

**MAXIMUS**

MAXIMUS



Motor Switch Breaker

MAKOFOL 2MIFCU BLESKEL

# MOTOR SWITCH BREAKER

## SWITCH STARTER/SAFEMOTOR CABLED IN FACTORY

Switch/starter for single/triple motors especially suitable for machines used in construction industry, industry and packaging where a thermic protection is required as well as an emergency stop at the motor due to power break. All appliances have been manufactured according EN 60957-4-1 and EN 60947-4-A1 rules. Built in minimum tension coil, thermic relays for protection against over charging, emergency button with block and holder in thermo polymer, colour RAL 7035 extremely resistant to collision and atmospheric agents.



Art. MR2101

Technical data page 110 pictures 52


## SERIES CS

Motor switch breaker with minimum tension coil

Code for plugs entering	Volts	Ampere	Power	
			KW	HP
MR2100	220 V	6,3 ÷ 10 A	1,4 - 2,5	2 - 3,5
MR2101	220 V	10 ÷ 16 A	2,5 - 4,4	3,5 - 6
MR2102	380 V	2,4 ÷ 4 A	1,1 - 1,8	1,5 - 2,5
MR2103	380 V	4 ÷ 6,3 A	1,8 - 2,9	2,5 - 4
MR2104	380 V	6,3 ÷ 10 A	2,9 - 4,4	4 - 6
MR2105	380 V	10 ÷ 16 A	4,4 - 8	6 - 11
MR2106	220 V	20 ÷ 25 A	5,5 - 7,5	7,5 - 10,5
MR2107	380 V	20 ÷ 25 A	11 - 12,5	15,5 - 17,5
MR2109	220 V	4 ÷ 6,3 A	11,1 - 1,5	1,5 - 2

## SERIES CO

Motor switch breaker with minimum tension coil and transformer  
*Suggested use: when the stop/emergency button is out of the box*

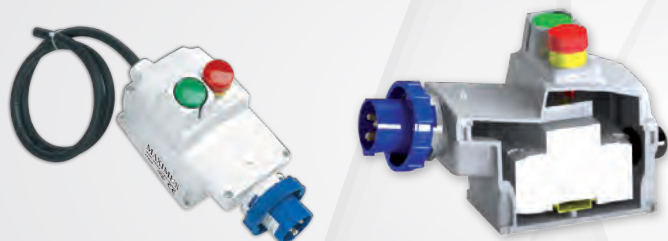

Art. MR2111

Technical data page 111 pictures 77

Code for plugs entering	Volts	Ampere	Power	
			KW	HP
MR2110	220 V	6,3 ÷ 10 A	1,4 - 2,5	2 - 3,5
MR2111	220 V	10 ÷ 16 A	2,5 - 4,4	3,5 - 6
MR2112	380 V	2,4 ÷ 4 A	1,1 - 1,8	1,5 - 2,5
MR2113	380 V	4 ÷ 6,3 A	1,8 - 2,9	2,5 - 4
MR2114	380 V	6,3 ÷ 10 A	2,9 - 4,4	4 - 6
MR2115	380 V	10 ÷ 16 A	4,4 - 8	6 - 11
MR2116	220 V	20 ÷ 25 A	5,5 - 7,5	7,5 - 10,5
MR2117	380 V	20 ÷ 25 A	11 - 12,5	15,5 - 17,5
MR2119	220 V	4 ÷ 6,3 A	11,1 - 1,5	1,5 - 2

## SERIES CP

Switch Starter with minimum tension coil



Art. CP MR2122

Art. CP MR2120

Art. CP 2122 Technical data page 111 pictures 78  
Art. CP 2120 Technical data page 111 pictures 78

MR2120	220 V		16A	Avviatore Starter
MR2122	220 V		16A	Avviatore Starter
MR2123	380 V	Protezione termica	16A	Avviatore Starter

## Motor protection with capacitor FOR MIXERS

Articolo item	Descrizione / Description
MR2140	CASSETTA SALVAMOTORE CON SPINA 2P+T 16A IP67, FUSIBILI DI PROTEZIONE E CONDENSATORE DA 35 MICROFARAD ADATTO PER BETONIERE/IMPASTATRICI 180/250LT CON MOTORE DA 1 HP, COMPLETA DI STAFFA DI FISSAGGIO INCORPORATA PER MONTANTE mm 80
MR2141	CASSETTA SALVAMOTORE CON SPINA 2P+T 16A IP67, FUSIBILI DI PROTEZIONE E CONDENSATORE DA 50 MICROFARAD ADATTO PER BETONIERE/IMPASTATRICI 320/360LT CON MOTORE DA 2 HP, COMPLETA DI STAFFA DI FISSAGGIO INCORPORATA PER MONTANTE mm 100



Art. MR2141